

# Industrial components for fluid dispensers

## Silicone Sealant RTV Caulk Tube Adapter Fittings for 310ml Tubes



### Nylon Caulk Tube Adapter


High density, reusable adapter made from white nylon. Thread that fits all 310ml silicone caulk tubes. The other end has a 1/4" NPT thread to accept nozzles and fittings.

Code	Material	Thread	Colour
TSD931-296	Nylon	1/4" NPT	White

### Stainless Steel Caulk Tube Adapter

Reusable adapter made from type 304 stainless steel. Thread that fits all 310ml silicone caulk tubes. The other end has a 1/4" NPT thread to accept nozzles and fittings. Industrial grade safe to 100 PSI.

Code	Material	Thread
TSD931-296SS	Stainless Steel	1/4" NPT

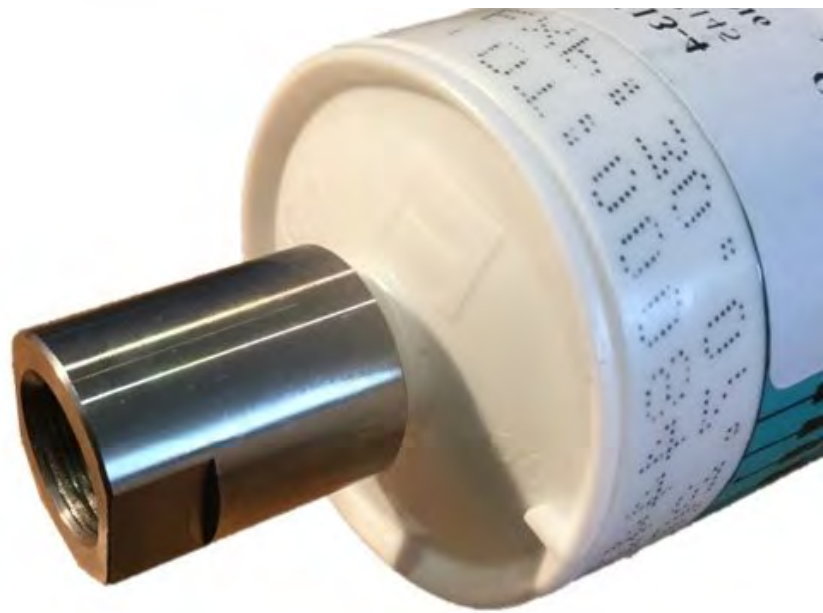

### Push-On Nylon Caulk Tube Adapter

High density, reusable adapter made from natural nylon. Pushes over all 310ml silicone caulk tubes. The other end has a 1/4" NPT thread to accept nozzles and fittings.

Code	Material	Thread	Colour
229306	Nylon	1/4" NPT	Natural

Silicone Free  
Components


Industrial  
Grade Safe



## Tip Adapter Fittings

Threads to the TSD931-296 caulk adapter converting the end to male luer lock for leak free attachment of all dispensing tips. Features a 1/4" NPT thread. Available in different materials. Safe for us to 100 PSI. Silicone-free parts.

Code	Material	Colour
TSD931-7	Polypropylene	White
TSD931-14	Polypropylene	Black
TSD931-7C	Polypropylene	Clear
TSD931-7M	Nickel Plated Brass	Silver

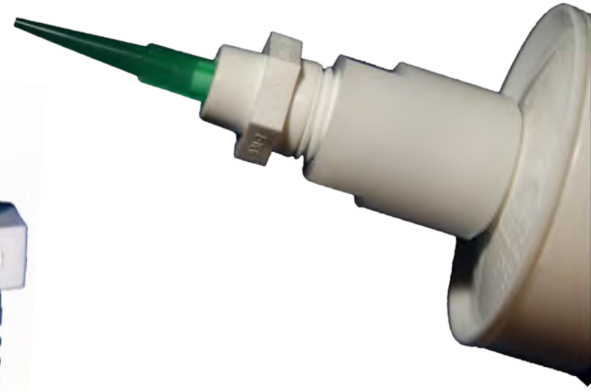

## Syringe Filling Fittings

Threads to the TSD931-296 caulk adapter converting the end to female luer lock for leak free attachment of all syringe barrels. Features a 1/4" NPT thread. Available in different materials. Safe for us to 100 PSI. Silicone-free parts.

Code	Material	Colour
TSD931-15	Polypropylene	Black
TSD931-15C	Polypropylene	Clear
TSD931-15SS	Stainless Steel	Silver
TSD931-15NPB	Nickel Plated Brass	Silver



## Nozzles

Threads to the TSD931-296 caulk adapter for leak free dispensing of dots and beads. Safe for us to 100 PSI. Silicone-free parts. Polyethylene material.

Code	Length	ID
TS216	2.5"	1/16"
TS218	2.5"	1/8"
TS416	4.0"	1/16"
TS418	4.0"	1/8"
TS432	4.0"	1/32"
TS490	4.0"	3/32"
TS616	6.0"	1/16"
TS618	6.0"	1/8"

